

# Ecoline 80W

## OUTDOOR LUMINAIRE



## NL-ECL-540×260-80W-xx-yy

### PRODUCT SPECIFICATIONS

Product code	NL-ECL-540×260-80W-xx
Voltage	220 V - 240 V
LED driver	OSRAM OT90/170-277/1A04DIMLT2E
System power	80 W
Frequency	50–60 Hz
Power factor (PF)	0,95
LED type	Alder AS-5258WxA2-C2C210-0303
Number of LEDs	40 pcs
Beam angle	120° / 90° / 60° / 30°
PCB material	aluminum
Dimensions	540 mm × 260 mm × 185 mm
Weight	4,8 kg
Protection	IP65
Operating temperature (tc)	-30° C – +75° C
Ambient temperature (ta)	-30° C – +50° C
Lifetime (L70)	min. 70 000 h
Color rendering index	Ra>80
Housing color	grey



MADE IN EU

IP65

IK08

DALI

CLO

ASTRO  
DIM

MAINS  
DIM

STEP  
DIM



*LED driver is separated from LED module*



*Adjustable tilt angle*

### COLOR TEMPERATURE AND LUMINOUS FLUX



order no.	product code	beam angle	color temperature	CCT	luminous flux
51761-65	NL-ECL-540x260-80W-WC-c	120°	cold white	6 500 K	11 020 lm
51761-50	NL-ECL-540x260-80W-WD-c	120°	daylight white	5 000 K	11 020 lm
51761-40	NL-ECL-540x260-80W-WN-c	120°	normal white	4 000 K	11 020 lm
51761-30	NL-ECL-540x260-80W-WW-c	120°	warm white	3 000 K	9 930 lm
51762-65	NL-ECL-540x260-80W-WC-90	90°	cold white	6 500 K	11 020 lm
51762-50	NL-ECL-540x260-80W-WD-90	90°	daylight white	5 000 K	11 020 lm
51762-40	NL-ECL-540x260-80W-WN-90	90°	normal white	4 000 K	11 020 lm
51762-30	NL-ECL-540x260-80W-WW-90	90°	warm white	3 000 K	9 930 lm
51763-65	NL-ECL-540x260-80W-WC-60	60°	cold white	6 500 K	11 020 lm
51763-50	NL-ECL-540x260-80W-WD-60	60°	daylight white	5 000 K	11 020 lm
51763-40	NL-ECL-540x260-80W-WN-60	60°	normal white	4 000 K	11 020 lm
51763-30	NL-ECL-540x260-80W-WW-60	60°	warm white	3 000 K	9 930 lm
51764-65	NL-ECL-540x260-80W-WC-30	30°	cold white	6 500 K	11 020 lm
51764-50	NL-ECL-540x260-80W-WD-30	30°	daylight white	5 000 K	11 020 lm
51764-40	NL-ECL-540x260-80W-WN-30	30°	normal white	4 000 K	11 020 lm
51764-30	NL-ECL-540x260-80W-WW-30	30°	warm white	3 000 K	9 930 lm

### PRODUCT FEATURES

The Ecoline 80W, manufactured with the latest Alder LED technology, is designed for outdoor lighting of roads, car parks and buildings.

The Ecoline Series is equipped with the AstroDIM feature, which allows additional energy savings in twilight phases. Furthermore, MainsDIM for dimming via reduction of line voltage amplitude and DALI for intelligent light management. A constant luminous flux can be set by using the CLO function.

The luminaire has an integrated surge protection and it is suitable for poles with a diameter of max 60mm.

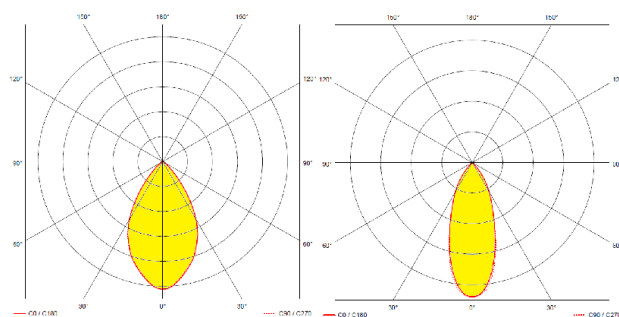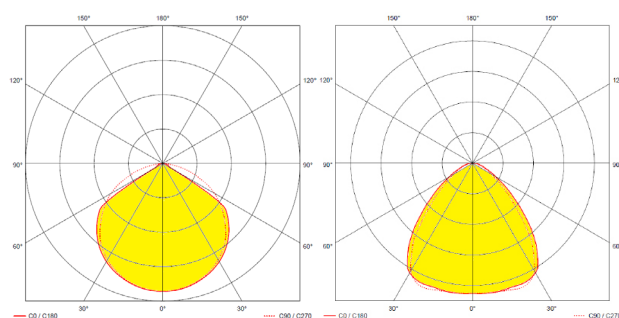

*With several possible beam angles, the luminaire is ideal for installation in different heights and situations.*