

## NL-HLC-320×220-145W-xx

### PRODUCT SPECIFICATIONS


Product code	NL-HLC-320×220-145W-xx
Voltage	220 V - 240 V
System power	145 W
Frequency	50–60 Hz
Power factor (PF)	> 0,95
LED type	AS-5630WxA2-C2C065-0101-YCx-LTH
Number of LEDs	350 pcs
Beam angle	120°
PCB material	aluminum
Dimensions	323 mm × 220 mm × 176 mm
Weight	4,1 kg
Protection	IP65
Operating temperature (tc)	-20° C – +68° C
Ambient temperature (ta)	-20° C – +45° C
Lifetime (L70)	min. 70 000 h
Color rendering index	Ra > 80
Housing color	light grey



155 LM/W

IP65

120°

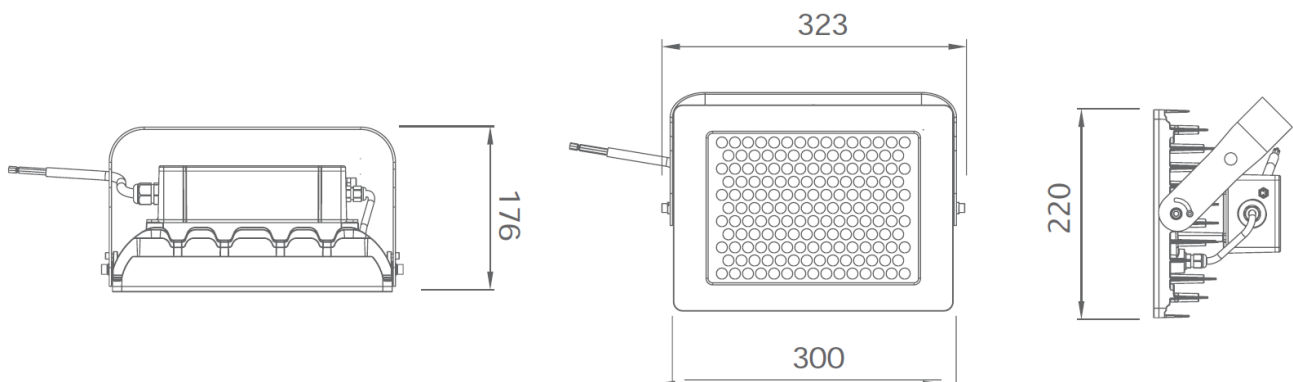

*The solid die-cast aluminum housing is equipped with a rotatable bracket made of stainless steel.*

# Arena Pro HLC 145W

## INDUSTRIAL LUMINAIRE



### PRODUCT FEATURES

The Arena Pro HLC is designed especially for industrial and sports halls.



A robust aluminum body ensures perfect heat dissipation and forms a load-bearing structure with high strength. The Arena Pro HLC is designed in a simple design and thanks to its rotatable bracket it is practically usable in various spaces.

IP65 protection is suitable for both indoor and outdoor use.



### COLOR TEMPERATURE AND LUMINOUS FLUX

order no.	product code	diffuser / angle	CCT	color temperature	luminous flux
98432-65	NL-HLC-320×220-120W-WC	clear / 120°	6 500 K	cold white	21 630 lm
98432-50	NL-HLC-320×220-120W-WD	clear / 120°	5 000 K	daylight white	22 530 lm
98432-40	NL-HLC-320×220-120W-WN	clear / 120°	4 000 K	normal white	22 530 lm
98432-30	NL-HLC-320×220-120W-WW	clear / 120°	3 000 K	warm white	20 050 lm

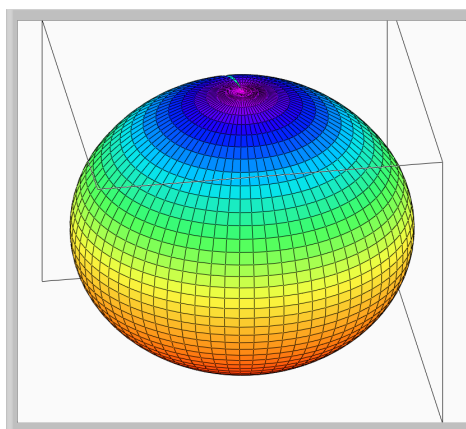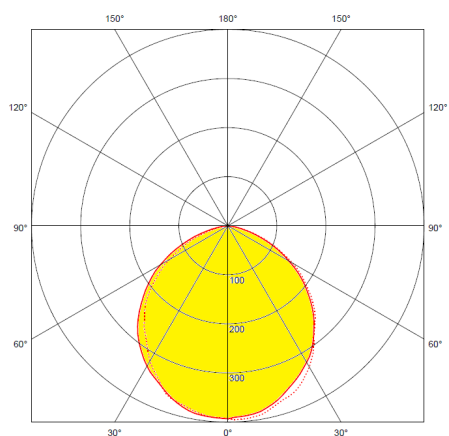

### SOUVISEJÍCÍ VÝROBKY

The HLC series is complemented by variants with beam angles of 60° and 60°/90°. With different optics, the light fixture is ideal for installation at different heights and situations.