


NL-OLL-4850x60-yyW-xx

PRODUCT SPECIFICATIONS

| | |
|----------------------------|-----------------------------------|
| Product code | NL-OLL-4850x60-yyW-xx |
| Voltage | 220 V - 240 V |
| System power | 178 W, 164 W, 151 W |
| Frequency | 50–60 Hz |
| Power factor (PF) | 0,95 |
| LED type | Alder AS-5630WxA2-C4C120-0101-YC8 |
| Number of LEDs | 504 pcs |
| Beam angle | 120° |
| PCB material | FR4 |
| Dimensions | 4850 mm × 60 mm × 70 mm |
| Weight | 9,6 kg |
| Protection | IP20 |
| Operating temperature (tc) | -20° C – +68° C |
| Ambient temperature (ta) | -20° C – +45° C |
| Lifetime (L70) | min. 70 000 h |
| Color rendering index | Ra>80 |
| Luminaire color | silver |

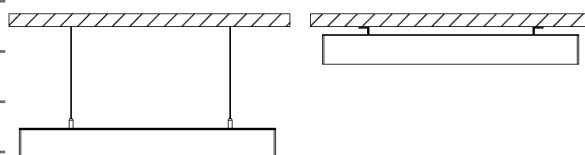

MADE IN EU

DALI

120°

TOUCH
DIM

CLO

IP20



PRODUCT FEATURES

Offico luminaires are linear light fixtures designed for interior lighting. Installation is possible as a surface or pendant luminaire. Offico luminaires are designed especially for modern offices.

The luminaire is also available as a DALI version, which offers various dimming and control options. With the CLO function, a constant luminous flux can be set.

| order no. | product code | diffuser/version | CCT | luminous flux |
|-----------|----------------------------|------------------|--|---------------|
| 54250-xx | NL-OLL-4850x60-178W-xx-m | 178W | xx ... | 22 440 lm |
| 54252-xx | NL-OLL-4850x60-178W-xx-m-D | 178W DALI | WD for 5000K, WN for 4000K, WW for 3000K | 22 440 lm |
| 54260-xx | NL-OLL-4850x60-164W-xx-m | 164W | | 20 680 lm |
| 54262-xx | NL-OLL-4850x60-164W-xx-m-D | 164W DALI | luminous flux is 10% lower for 3000K | 20 680 lm |
| 54270-xx | NL-OLL-4850x60-151W-xx-m | 151W | | 19 040 lm |
| 54272-xx | NL-OLL-4850x60-151W-xx-m-D | 151W DALI | | 19 040 lm |