

# TPL 1500 63W

## LINEAR LUMINAIRE



## NL-TPL-1500x80-63W-xx-z

### PRODUCT SPECIFICATIONS

Product code	NL-TPL-1500x80-63W-xx-z
Voltage	220 V - 240 V
LED driver	OSRAM OT FIT 75/220-240/1A4 CS L G2
System power	63 W
Frequency	50–60 Hz
Power factor (PF)	0,98
LED type	AS-5630WxA2-C2C065-0101-YCx-LTH
Number of LEDs	160 pcs
Beam angle	120°
PCB material	aluminum
Dimensions	1500mm x 80mm x 77mm
Weight	3,1 kg
Protection	IP65
Operating temperature (tc)	-20° C – +68° C
Ambient temperature (ta)	-20° C – +45° C
Lifetime (L70)	min. 70 000 h
Color rendering index	Ra > 80



MADE IN EU

IP65

DALI


TOUCH  
DIM

CLO

IK08

EMERG.

120°

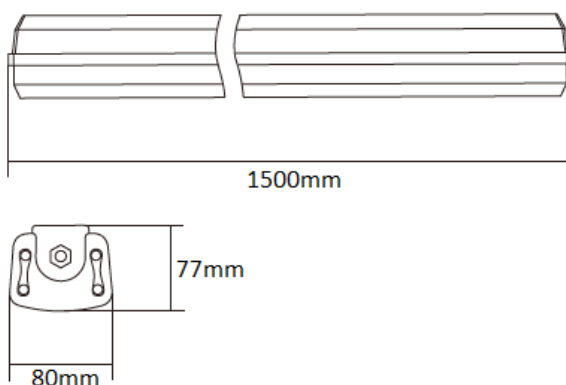

*A high-quality aluminium body provides excellent heat dissipation.*



# TPL 1500 63W

## LINEAR LUMINAIRE



### PRODUCT FEATURES

Quality and versatile linear TPL luminaires are particularly suitable for lighting in industry systems, corridors and workshops. The high IP code protects the luminaire from dust particles and adverse the effects of industrial environments.

The aluminum body ensures optimum heat dissipation. The light fixture can be mounted with brackets directly to the ceiling or as a pendant luminaire.

TPL luminaires come with a milky diffuser as standard. A clear diffuser can be used for higher ceilings. The fixture can be equipped with an emergency module or DALI.



### COLOR TEMPERATURE AND LUMINOUS FLUX

order no.	product code	diffuser / version	CCT	color temperature	luminous flux
51981-50	NL-TPL-1500x80-63W-WD-m	milky / standard	5 000 K	daylight white	9 070 lm
51981-40	NL-TPL-1500x80-63W-WN-m	milky / standard	4 000 K	normal white	9 070 lm
51981-30	NL-TPL-1500x80-63W-WW-m	milky / standard	3 000 K	warm white	8 170 lm
51982-50	NL-TPL-1500x80-63W-WD-c	clear / standard	5 000 K	daylight white	9 590 lm
51982-40	NL-TPL-1500x80-63W-WN-c	clear / standard	4 000 K	normal white	9 590 lm
51982-30	NL-TPL-1500x80-63W-WW-c	clear / standard	3 000 K	warm white	8 630 lm
51986-50	NL-TPL-1500x80-63W-WD-m-D	milky / DALI	5 000 K	daylight white	9 070 lm
51986-40	NL-TPL-1500x80-63W-WN-m-D	milky / DALI	4 000 K	normal white	9 070 lm
51986-30	NL-TPL-1500x80-63W-WW-m-D	milky / DALI	3 000 K	warm white	8 170 lm
51987-50	NL-TPL-1500x80-63W-WD-c-D	clear / DALI	5 000 K	daylight white	9 590 lm
51987-40	NL-TPL-1500x80-63W-WN-c-D	clear / DALI	4 000 K	normal white	9 590 lm
51987-30	NL-TPL-1500x80-63W-WW-c-D	clear / DALI	3 000 K	warm white	8 630 lm
51983-50	NL-TPL-1500x80-63W-WD-m-N	milky / emergency	5 000 K	daylight white	9 070 lm
51983-40	NL-TPL-1500x80-63W-WN-m-N	milky / emergency	4 000 K	normal white	9 070 lm
51983-30	NL-TPL-1500x80-63W-WW-m-N	milky / emergency	3 000 K	warm white	8 170 lm
51984-50	NL-TPL-1500x80-63W-WD-c-N	clear / emergency	5 000 K	daylight white	9 590 lm
51984-40	NL-TPL-1500x80-63W-WN-c-N	clear / emergency	4 000 K	normal white	9 590 lm
51984-30	NL-TPL-1500x80-63W-WW-c-N	clear / emergency	3 000 K	warm white	8 630 lm
51988-50	NL-TPL-1500x80-63W-WD-m-D-N	milky / DALI / emerg.	5 000 K	daylight white	9 070 lm
51988-40	NL-TPL-1500x80-63W-WN-m-D-N	milky / DALI / emerg.	4 000 K	normal white	9 070 lm
51988-30	NL-TPL-1500x80-63W-WW-m-D-N	milky / DALI / emerg.	3 000 K	warm white	8 170 lm
51989-50	NL-TPL-1500x80-63W-WD-c-D-N	clear / DALI / emerg.	5 000 K	daylight white	9 590 lm
51989-40	NL-TPL-1500x80-63W-WN-c-D-N	clear / DALI / emerg.	4 000 K	normal white	9 590 lm
51989-30	NL-TPL-1500x80-63W-WW-c-D-N	clear / DALI / emerg.	3 000 K	warm white	8 630 lm