

TPL 365 14W

LINEAR LUMINAIRE



NL-TPL-365x80-14W-xx-z

PRODUCT SPECIFICATIONS

Product code	NL-TPL-365x80-14W-xx-z
Voltage	220 V - 240 V
LED driver	OSRAM OT FIT 15/220-240/500 LT2 S
System power	14 W
Frequency	50–60 Hz
Power factor (PF)	0,98
LED type	AS-5630WxA2-C2C065-0101-YCx-LTH
Number of LEDs	32 pcs
Beam angle	120°
PCB material	aluminum
Dimensions	365mm x 80mm x 77mm
Weight	0,9 kg
Protection	IP65
Operating temperature (tc)	-20° C – +68° C
Ambient temperature (ta)	-20° C – +45° C
Lifetime (L70)	min. 70 000 h
Color rendering index	Ra > 80



MADE IN EU

IP65


DALI

TOUCH
DIM

IK08



CLO

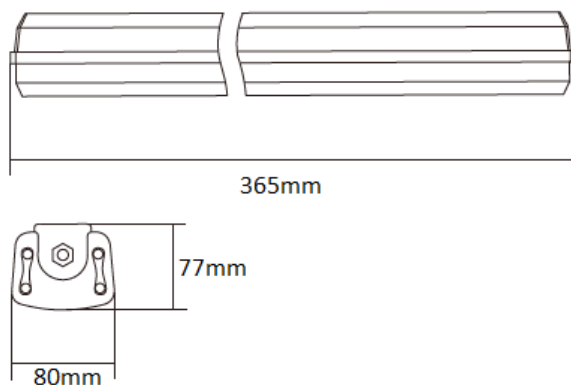

A high-quality aluminium body provides excellent heat dissipation.



TPL 365 14W

LINEAR LUMINAIRE



PRODUCT FEATURES

Quality and versatile linear TPL luminaires are particularly suitable for lighting in industry systems, corridors and workshops. The high IP code protects the luminaire from dust particles and adverse the effects of industrial environments.

The aluminum body ensures optimum heat dissipation. The light fixture can be mounted with brackets directly to the ceiling or as a pendant luminaire.

TPL luminaires come with a milky diffuser as standard. A clear diffuser can be used for higher ceilings. The fixture can be equipped with DALI.



COLOR TEMPERATURE AND LUMINOUS FLUX

order no.	product code	diffuser / version	CCT	color temperature	luminous flux
52461-50	NL-TPL-365x80-14W-WD-m	milky / standard	5 000 K	daylight white	1 930 lm
52461-40	NL-TPL-365x80-14W-WN-m	milky / standard	4 000 K	normal white	1 930 lm
52461-30	NL-TPL-365x80-14W-WW-m	milky / standard	3 000 K	warm white	1 740 lm
52462-50	NL-TPL-365x80-14W-WD-c	clear / standard	5 000 K	daylight white	2 050 lm
52462-40	NL-TPL-365x80-14W-WN-c	clear / standard	4 000 K	normal white	2 050 lm
52462-30	NL-TPL-365x80-14W-WW-c	clear / standard	3 000 K	warm white	1 850 lm
52463-50	NL-TPL-365x80-14W-WD-m-D	milky / DALI	5 000 K	daylight white	1 930 lm
52463-40	NL-TPL-365x80-14W-WN-m-D	milky / DALI	4 000 K	normal white	1 930 lm
52463-30	NL-TPL-365x80-14W-WW-m-D	milky / DALI	3 000 K	warm white	1 740 lm
52464-50	NL-TPL-365x80-14W-WD-c-D	clear / DALI	5 000 K	daylight white	2 050 lm
52464-40	NL-TPL-365x80-14W-WN-c-D	clear / DALI	4 000 K	normal white	2 050 lm
52464-30	NL-TPL-365x80-14W-WW-c-D	clear / DALI	3 000 K	warm white	1 850 lm