

# Wall Pack 40W

## WALL LUMINAIRE



## NL-WPS-235x165-40W-xx

### PRODUCT SPECIFICATIONS

Product code	NL-WPS-235x165-40W-xx
Voltage	220 V - 240 V
LED driver	OSRAM OT FIT 40/220-240/1A0 LT2 S
System power	40 W
Frequency	50–60 Hz
Power factor (PF)	0,95
LED type	Alder AS-5258WxA2-C2C210-0303
Number of LEDs	20 pcs
Beam angle	130°/60°
PCB material	aluminum
Dimensions	235mm x 165mm x 108mm
Weight	1,9 kg
Protection	IP65
Operating temperature (tc)	-20° C – +68° C
Ambient temperature (ta)	-20° C – +45° C
Lifetime (L70)	min. 75 000 h
Color rendering index	Ra>80
Housing color	black





MADE IN EU

IP65

IK08

130°/60°

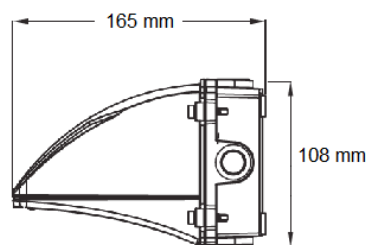

# Wall Pack 40W

## WALL LUMINAIRE



### COLOR TEMPERATURE AND LUMINOUS FLUX

order no.	product code	color temperature	CCT	luminous flux
54303-65	NL-WPS-235x165-40W-WC	cold white	6 500 K	5 420 lm
54303-50	NL-WPS-235x165-40W-WD	daylight white	5 000 K	5 420 lm
54303-40	NL-WPS-235x165-40W-WN	normal white	4 000 K	5 420 lm
54303-30	NL-WPS-235x165-40W-WW	warm white	3 000 K	4 880 lm


### PRODUCT FEATURES

The Wall Pack 40W luminaire, manufactured with the latest Alder LED technology, is intended as outdoor or indoor LED lighting for hotels, garages, commercial buildings, public spaces, schools, etc.

Asymmetric optics of the light fixture ensure that the light is directed correctly.



*Uniform light distribution by using asymmetric optics*

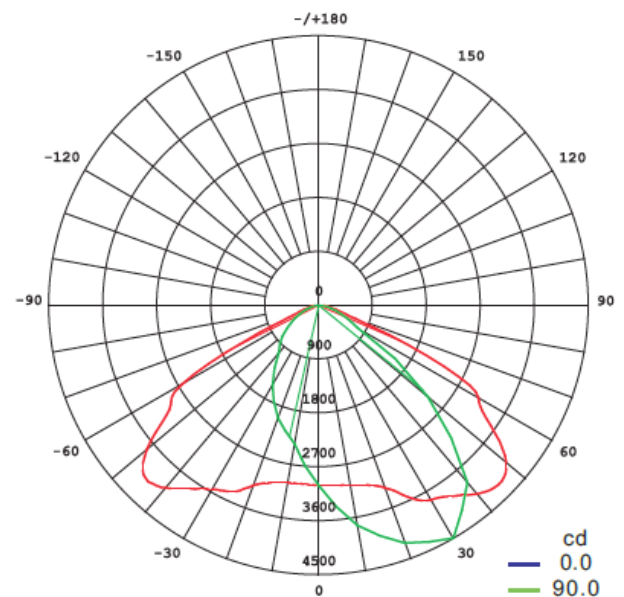

### Similar products:

#### Wall Pack 72W

order no.	product code	color temperature	CCT	luminous flux
54307-65	NL-WPL-325x195-72W-WC	cold white	6 500 K	9 760 lm
54307-50	NL-WPL-325x195-72W-WD	daylight white	5 000 K	9 760 lm
54307-40	NL-WPL-325x195-72W-WN	normal white	4 000 K	9 760 lm
54307-30	NL-WPL-325x195-72W-WW	warm white	3 000 K	8 790 lm